


Automatic Case Packers

SOFT Packing for Empty Containers

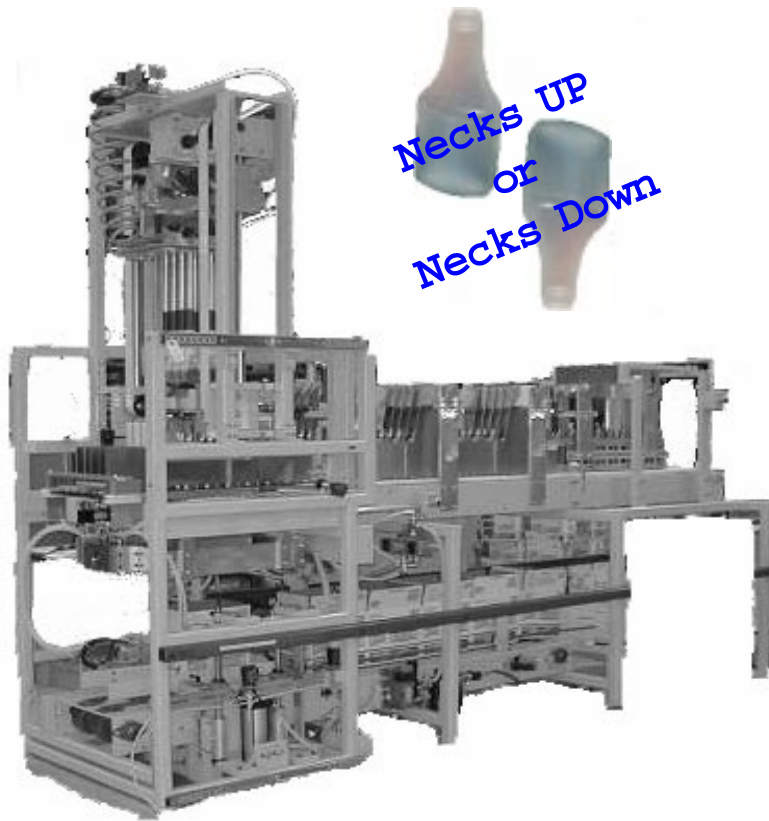

*Com-Pak Drop Packer with
a Servo SOF-PAC® attachment
plus a lane divider*

Phone: (513) 874-1233

Fax: (513) 874-3375

Email: sales@climaxpackaging.com

Visit our home page at

www.climaxpackaging.com

25 Standen Drive Hamilton, OH 45015

• Containers can be:

plastic, glass, metal,
or composite

Round or non-round
containers

• Servo or Air cylinder
for vertical drive on
the Sof-Pac®

• Speeds up to 15 CPM
with *single* case pack
(25 CPM with *double*)

• PLC controls

• Built-in lane divider

• Modifications upon
request

CLIMAX
PACKAGING MACHINERY



Climax SOFT Packer with a Servo SOF-PAC® Attachment plus a Lane Divider

Specifications

ELECTRICAL

Motors -- 230/460 Volts, 60 HZ, 3 Phase
Controls -- 115 Volts, 60 HZ, 1 Phase
Total Amps -- 12 (Air cylinder) - 45 (Servo)

PNEUMATICS

Minimum air supply required = 60 PSI
Air consumption = .05 CFM per cycle

DRIVES

Container Conveyor:
DP4 = 1.5 HP variable speed, Com-Pak = 1 HP variable speed
Case Conveyor = 1 HP fixed speed (both models)

CASE/TRAY SIZE RANGE

	<u>DP4 plus Sof-Pac</u>		<u>Com-Pak plus Sof-Pac</u>	
	<u>Minimum</u>	<u>Maximum</u>	<u>Minimum</u>	<u>Maximum</u>
Length	8"	22"	8"	20"
Width	8"	15"	5"	12"
Height (score)	2" (tray)	18"	2" (tray)	14"

SHIPPING WEIGHT (approximate)

4200 lb. (1905 Kg.)

3000 lb. (1360 Kg.)



This particular Climax client has run up to 210,000 PET bottles in a twelve hour shift.

That is an average packing speed of 24.3 CPM - Assuming that the line never had any down time!

CLIMAX
PACKAGING MACHINERY

(513) 874-1233 FAX: (513) 874-3375

Email: sales@climaxpackaging.com
25 Standen Drive Hamilton, OH 45015