


Automatic Case Packers

SOFT Packing

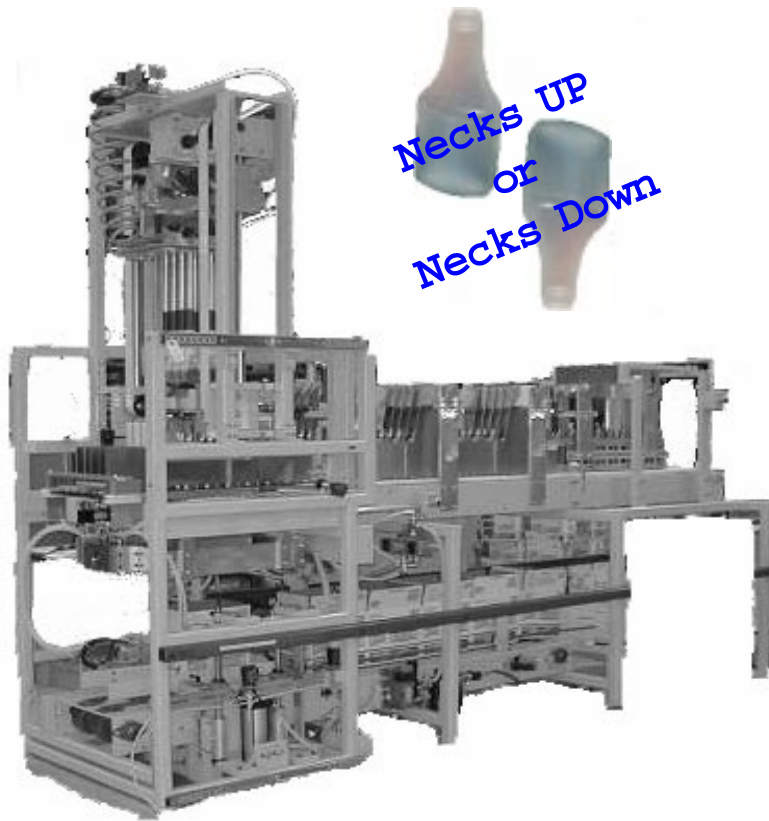

*Com-Pak Drop Packer with
a Servo SOF-PAC® attachment
plus a lane divider*

Phone: (513) 874-1233

Fax: (513) 874-3375

Email: sales@climaxpackaging.com

Visit our home page at

www.climaxpackaging.com

25 Standen Drive Hamilton, OH 45015

• Containers can be:

plastic, glass, metal,
or composite

• Round or non-round
containers,
empty or filled

• Servo or Air cylinder
for vertical drive on
the Sof-Pac®

• Speeds up to 15 CPM
with *single* case pack
(25 CPM with *double*)

• PLC controls

• Built-in lane divider

• Modifications upon
request

CLIMAX
PACKAGING MACHINERY



**Climax SOFT Packer
with a Servo SOF-PAC® Attachment**

Specifications

ELECTRICAL

Motors -- 230/460 Volts, 60 HZ, 3 Phase
Controls -- 115 Volts, 60 HZ, 1 Phase
Total Amps -- 12 (Air cylinder) - 45 (Servo)

PNEUMATICS

Minimum air supply required = 60 PSI
Air consumption = .05 CFM per cycle

DRIVES

Container Conveyor:
DP4 = 1.5 HP variable speed, Com-Pak = 1 HP variable speed
Case Conveyor = 1 HP fixed speed (both models)

CASE/TRAY SIZE RANGE

	DP4 plus Sof-Pac		Com-Pak plus Sof-Pac	
	<u>Minimum</u>	<u>Maximum</u>	<u>Minimum</u>	<u>Maximum</u>
Length	8"	22"	8"	20"
Width	8"	15"	5"	12"
Height (score)	2" (tray)	18"	2" (tray)	14"

SHIPPING WEIGHT (approximate)

4200 lb. (1905 Kg.) 3000 lb. (1360 Kg.)



This particular Climax client has run up to 210,000 PET bottles in a twelve hour shift.

That is an average packing speed of 24.3 CPM - Assuming that the line never had any down time!

CLIMAX
PACKAGING MACHINERY

(513) 874-1233 FAX: (513) 874-3375

Email: sales@climaxpackaging.com
25 Standen Drive Hamilton, OH 45015