

# Climax Tray Stacker



The Climax Automatic Stackers are available in inline and right angle configurations. With speeds up to 40 TPM, they are versatile and compact units that handle a wide range of tray sizes.

Call us with your application!  
**(513) 874-1233**

Fax: (513) 874-3375

25 Standen Drive Hamilton, OH 45015

email: [info@climaxpackaging.com](mailto:info@climaxpackaging.com)



- **Inline Stacker or Re-Orienting Stacker (90 degrees)**
- **Speeds to 40 TPM**
- **5-Minute Changeover**
- **High Reliability / Low Maintenance**
- **Compact Floorplan**
- **Wide Range of Trays Sizes**
- **Able to stack two, three or four layers high**
- **PLC Controls**

**CLIMAX**  
**PACKAGING MACHINERY**

# SPECIFICATIONS

**MAXIMUM SPEED** – 40 TPM

**TRAY SIZE RANGE:**

Minimum – 10”L x 6”W x 2”H  
 Maximum – 22”L x 15”W x 7”H

**SIZE RANGES CAN BE MODIFIED TO SUIT APPLICATION**

**PNEUMATICS:**

Minimum air supply required – 60 PSIG  
 Air Consumption – 1.5 CFM/Cycle


**CONVEYOR:** (Customer Provided)

Light Duty Accumulating –  
 Infeed & Outfeed


**½ HP Drive**

**ELECTRICAL:**

Motors – 230/60/3  
 Controls – 115/60/1  
 Total Amps – 4 Amps

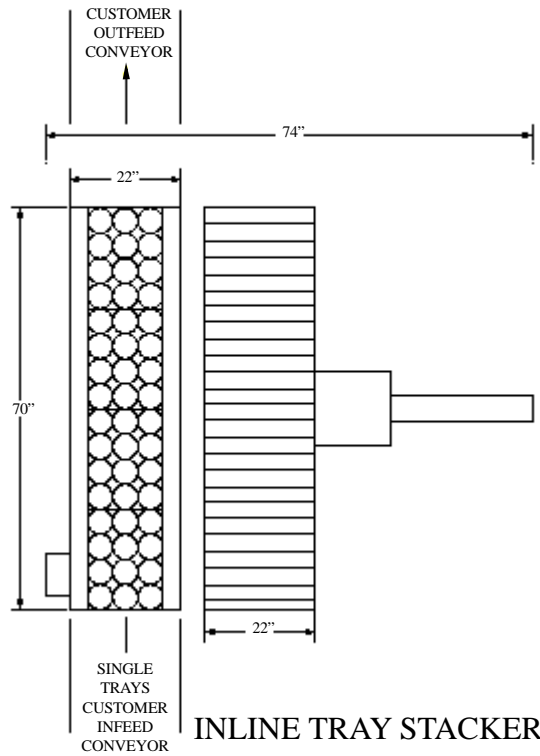

**INLINE TRAY STACKER**

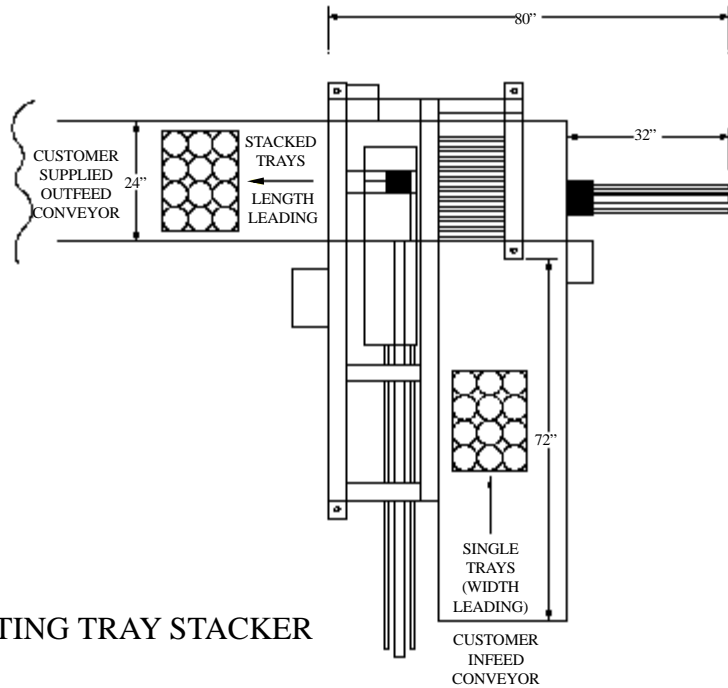

**RE-ORIENTING TRAY STACKER**



**CLIMAX**  
**PACKAGING MACHINERY**